

JB 121



CRANE CAPACITY 200 T
ACCOMODATION (max.) 354 POB

HELI DECK 22 M / 14 T
VARIABLE LOAD 1.834 T

LEG LENGTH 147 M
DECK AREA 1340 M2



JB 121

GustoMSC AJ46-360-C

Gusto MSC, ABS classification, China

A1 Self-elevating Unit, Accommodation

Length	65 m
Breadth	62 m
Depth	8 m
Draft (max.)	5 m
Deck area	1.340 m ²
Leg length	147 m
Variable load	1.834 t
Spudcan (cookie cutter)	Surface is 150 m ² each

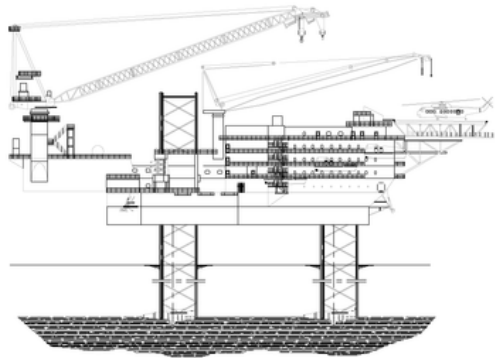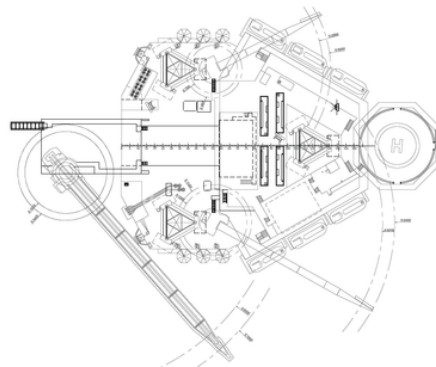

JACKING SYSTEM

Make	GustoMSC Rack-and-Pinion Jacking system
Capacity	5.706 T pre-load per leg
Jacking speed up	max. 0.45 m / minute (synchronous)
Jacking speed down	max. 0.68 m / minute (synchronous)

MOORING SYSTEM

Winches	4 x 35 t line pull
Length	700 m installed
Type	electric driven
Anchors	4 x HHP Delta anchor
Weight	3,5 t

TANKS CAPACITY

Fuel oil	586 m ³
Fresh water	1.300 m ³

MAIN CRANE

Make	LIEBHERR
Type	BOS 7500-200 EX Litronic electro-hydraulic drive
Boom length installed	67 m
Capacity installed	200 t
Capacity optional max.	200 t
Outreach	65 m (from crane center)

PORTSIDE AUXILIARY CRANE

Make	Favelle FAVCO
Type	8/10K
Boom length installed	52 m
Capacity installed	50 t
Capacity optional max.	50 t
Outreach	50 m (from crane center)

STARBOARD SIDE AUXILIARY CRANE

Make	Favelle FAVCO
Type	8/10K
Boom length installed	52 m
Capacity installed	50 t
Capacity optional max.	50 t
Outreach	50 m (from crane center)

JACKING CONDITIONS

Wave height (max. Hs)	1.2 m
Wind speed (max.)	8 m/s

SURVIVAL CONDITIONS (MAX. 106 m WATERDEPTH)

Wave height (max. Hs)	15 m
Air gap	15 m (at max. water depth)
Wind speed (max.)	51 m/s

ACCOMMODATION

While elevated	max. 354 POB (177 of 2-persons cabins)
----------------	---

HELI DECK

Size	22 m diameter
Capacity	14 t